



USA 243



**DOUBLE «S»**

*Horseshoes Worldwide*



2024

NEW

**30A**

LOOP DELUXE



# PRECISION

**BEYOND LIMITS**

- ▶ **NEW ERGONOMIC EXCELLENCE**
- ▶ **FEATHERLIGHT LAMINAR WOOD**
- ▶ **SUPERIOR BLADES**



*In this knife we put experience  
and know-how gained from  
30 years of company history*



USA 243

# HORSE SHOES WORLD WIDE

Embracing an innovative approach, Doubles crafts **top-notch, ingenious horseshoeing solutions.** Our focus: meeting customer needs and enhancing farriery trade for blacksmiths and retailers.



**Watch our  
New Film**



**Discover our  
New Website**



U.S. DISTRIBUTOR



**MUSTAD**  
THE HOOFCARE PEOPLE

**1 866-668-7642  
1 651-287-8289**


# OUR NEWS

## TOOLS



**LOOP 30A DELUXE**

pg. 10

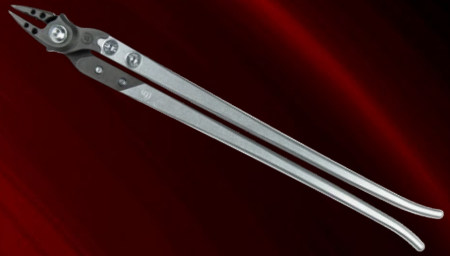

**FORGING TONGS**

pg. 6

## QUARTER HORSE



**QH8F**

pg. 15



**QH8B**

pg. 15



**QHFA**

pg. 16

## HAMMERS

pg. 11



✓ TESTED  
HANDLE



✓ TESTED  
HANDLE


# NEW WOOD RESTYLING



**DELUXE** LINE

pg. 9

*FIND OUT MORE INSIDE*

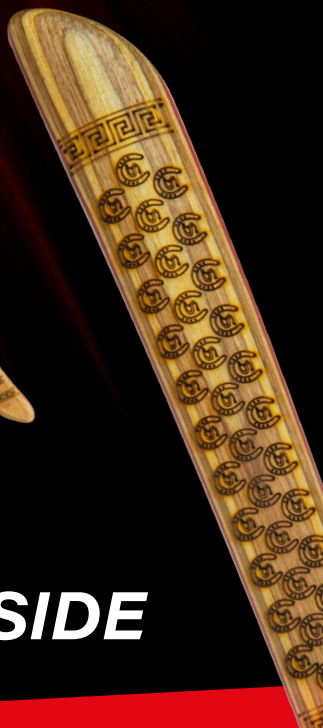


## FORGING TONGS

Crafted with artisanal mastery, the DoubleS tongs ensure an extremely firm and precise grip, excellent handling, and ease of use. Lightweight yet durable, they promise effortless operation and lasting performance. A true blend of strength and finesse for the discerning farrier.

**NEW**

| MEASURES* | GR. | MM. | MM. OPENING | ITEM       |
|-----------|-----|-----|-------------|------------|
| FT 7      | 425 | 365 | 7           | 40.30.FT7  |
| FT 8      | 425 | 365 | 8           | 40.30.FT8  |
| FT 10     | 425 | 365 | 10          | 40.30.FT10 |



## CLINCH GOUGE

Right / Left

Made from high quality tool steel paired with a high quality wooden handle, used for removing hoof material under the nail when clinching the nails, available in right and left hand versions.

|    | ITEM  |
|----|-------|
| R  | 40018 |
| L  | 40019 |
| gr | 150   |
| mm | 155   |



## CLINCH GOUGES

Right + Left

Having left and right ends gouges in one too, made from high quality tool steel paired with a high quality wooden handle, used for removing hoof material under the nail when clinching nails.

|    | ITEM   |
|----|--------|
|    | 443909 |
| gr | 150    |
| mm | 175    |



## HOOF PICK



40020

gr 128

mm 165

Foot cleaning tool made of high quality stainless steel with fine wooden handle. Single model usable by both right-handed and left-handed users.



## COMBI

Right / Left



R 40023

L 40024

gr 170

mm 175

Made from high quality tool steel paired with a high quality wooden handle, cutter used for cutting clinches and gouge used for removing hoof material under the nail when clinching nails. Available in right and left hand versions.



## CLINCH CUTTER

Right / Left



R 443907

L 443908

gr 181

mm 170

Made from high quality tool steel paired with a high quality wooden handle, cutter used for cutting clinches, available in left and right hand versions.



## CLASSIC

Right / Left



R 40003

L 40004

gr 102

mm 210

Farriers knife curved and concave blade to make trimming deeper cupped soles, superb material for durability and ease of sharpening. Available in right and left hand versions.

SHARPENING



**LOOP**



41586

**gr** 110  
**mm** 205

Making trimming frogs easier superb material for durability and ease of sharpening, longer ergonomic shaped handle for perfect grip made from sustainable wood stock. For right or left hands.

SHARPENING



**LEO**

**Right / Left**



**R** 444542

**L** 444543

**gr** 104  
**mm** 210

Classic farriers knife straight blade (less concave) make trimming of less cupped soles, superb material for durability and ease of sharpening. Available in right and left hand versions.

SHARPENING



**RHINO**

**Right / Left**



**R** 444525

**L** 444526

**gr** 106  
**mm** 210

Like the Leo with a small pick on the knife loop to make cleaning debris from the hoof easier. Classic farriers knife straight blade (less concave) make trimming of less cupped soles, superb material for durability and ease of sharpening. Available in right and left hand versions.

SHARPENING



**25A DELUXE**

Right / Left

Curved and concave blade to suit cupped sole hooves made from premium steel to give maximum durability and ease of sharpening, unique design handle to give optimum ergonomic comfort grip made with laminated wooden handle. Right and left handed versions.

| ITEM |       |
|------|-------|
| R    | 40037 |
| L    | 40038 |
| gr   | 102   |
| mm   | 210   |



**VET DELUXE**

Right / Left

Straight blade with slight curve with a small hook, small design of handle to make precision cutting easy, Premium steel to give durability and easy sharpening. Available in right and left handed versions.

| ITEM |       |
|------|-------|
| R    | 40033 |
| L    | 40034 |
| gr   | 55    |
| mm   | 170   |



**LEO DELUXE**

Right / Left

Straight blade knife, slightly curved and concave and without curl, adapts better to the concave shape of the sole. Longer wooden handle with ergonomic shape; Deluxe steel blade even more valuable. Two models available for right-handed and left-handed users.

SHARPENING

| ITEM |        |
|------|--------|
| R    | 444540 |
| L    | 444541 |
| gr   | 99     |
| mm   | 210    |



**RHINO DELUXE**

Right / Left

Curved and concave blade, without curl, adapts better to the concave shape of the sole; blade made of high quality steel and with a toe-cleaning ridge. Special wooden handle, studied and designed to offer a safe grip and high resistance, longer and with an ergonomic design. Two models available for right-handed and left-handed users.

SHARPENING

| ITEM |       |
|------|-------|
| R    | 40013 |
| L    | 40014 |
| gr   | 101   |
| mm   | 210   |



**CLASSIC DELUXE**

Right / Left

Curved and concave blade knife, without curl, adapts better to the concave shape of the sole. Wooden handle with ergonomic shape; Deluxe steel blade even more valuable. Two models available for right-handed and left-handed users.

SHARPENING




ITEM

R 444517

L 444516

gr 93

mm 210



**LOOP VET DELUXE**

Designed with a very small loop to make opening abscess easy and not leaving too large holes in sole. Ergonomic handle made from premium laminated wood, available in three loop sizes.

SHARPENING



**LOOP 30A DELUXE**

Optimal loop shape to make frog and hoof trimming effortless. Premium steel for durability and ease of sharpening. Ergonomic handle design for comfort and made from premium laminated wood, one version for right and left handed users.



ITEM

40.32.KNLP30

gr 120

mm 210



**SMALL**



ITEM

444545

gr 92

mm 200

**MEDIUM**



ITEM

40016

gr 92

mm 200

**LARGE**



ITEM

444546

gr 92

mm 200



1 866-668-7642  
1 651-287-8289

\*available

## ROUNDING HAMMER

TESTED HANDLE

Modeling hammer with one-way laminated wood handle and a special aluminum joint with O-Rings. It absorbs up to 30% of vibrations, a result recognized by scientifically based research carried out by the University of Trento.

TESTING



| LB  | GR. HEAD | GR. TOT. | MM. | ITEM   |
|-----|----------|----------|-----|--------|
| 1.8 | 800      | 970      | 435 | 188895 |
| 2.0 | 900      | 1070     | 435 | 188900 |
| 2.2 | 1000     | 1170     | 435 | 188901 |


## DRIVING HAMMER

TESTED HANDLE

Nail hammer with one-way laminated wood handle and a special aluminum joint with O-Rings to absorb vibrations and increase sensitivity. Equipped with a magnet at one end.

**Special feature:** anatomical handle and anti-chipping beater.

TESTING

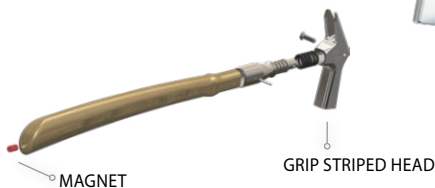

| OZ | GR. HEAD | GR. TOT. | MM. | ITEM   |
|----|----------|----------|-----|--------|
| 6  | 150      | 300      | 365 | 486999 |
| 7  | 175      | 315      | 365 | 487001 |
| 8  | 200      | 335      | 365 | 487000 |
| 10 | 250      | 370      | 365 | 487003 |

## ROUNDING HANDLE

TESTED HANDLE

One-way laminated wood handle and a special aluminum joint with O-Rings. Reduced vibration absorption.

HANDLE CHANGE



| ITEM   |
|--------|
| 480032 |
| gr 215 |
| mm 430 |

## DRIVING HANDLE

TESTED HANDLE

One-way laminated wood handle with special aluminum joint with O-Rings, equipped with a magnet at one end. **Special feature:** anatomical handle.

HANDLE CHANGE



| ITEM   |
|--------|
| 487004 |
| gr 150 |
| mm 360 |



**RASP TOP HANDLE**

Aluminum handle for standard rasps with 4 grub screws.


|  |
|--|
|  ITEM |
| 40022  |
| gr 143   |
| mm 95  |



**RASP END COVERS**

Made from high grade aluminium, milled to fit standard rasps. Made to give a better grip for using standard rasps.


|  |
|--|
|  ITEM |
| 40021  |
| gr 48  |





**RASP END COVERS  
REC eXcel**

Made from high grade aluminium, milled to fit wider rasps. Made to give a better grip for using standard rasps.

|  |
|--|
|  ITEM |
| 40036  |
| gr 54  |



# Slider



## S | SLIDER 1 1/4"

**Application:** Reining  
**Technology:** Steel

10 pairs



Slider steel hind shoe with tapered branches for better dirt clearing and keeping heels of shoe with optimum ground contact for the best slide. Slight rolled toe that is also rockered up. Suitable for all arena types.

| MEASURES** | A   | B   | C  | H1 | GR. | NAILS      | ITEM  |
|------------|-----|-----|----|----|-----|------------|-------|
| S 10"      | 106 | 135 | 33 | 6  | 320 | SLIDER 4.5 | 74062 |
| S 11"      | 111 | 140 | 33 | 6  | 340 | SLIDER 4.5 | 74063 |
| S 12"      | 116 | 145 | 33 | 6  | 360 | SLIDER 4.5 | 74064 |
| S 13"      | 121 | 150 | 33 | 6  | 380 | SLIDER 4.5 | 74065 |

## SM | SLIDER FUTURITY 1 1/4"

**Application:** Reining  
**Technology:** Steel

10 pairs



Steel hind shoe with extra tapped branches for dirt clearance and keeping the heels with good ground contact, with rolled and rockered toe.

| MEASURES** | A   | B   | C  | H1 | GR. | NAILS      | ITEM  |
|------------|-----|-----|----|----|-----|------------|-------|
| SM 10"     | 106 | 135 | 33 | 6  | 322 | SLIDER 4.5 | 74042 |
| SM 11"     | 111 | 140 | 33 | 6  | 338 | SLIDER 4.5 | 74043 |
| SM 12"     | 116 | 145 | 33 | 6  | 354 | SLIDER 4.5 | 74044 |
| SM 13"     | 121 | 150 | 33 | 6  | 373 | SLIDER 4.5 | 74045 |



## SL | SLIDER 1"

**Application:** Reining

**Technology:** Steel

10 pairs



Steel back horseshoes; tip flattened and slightly bent upwards with regular band. Suitable for horses with good braking and/or arenas with a good ground. Ideal for racing.

| MEASURES** | A   | B   | C  | H1 | GR. | NAILS      | ITEM  |
|------------|-----|-----|----|----|-----|------------|-------|
| SL 10"     | 106 | 135 | 25 | 6  | 295 | SLIDER 4.5 | 74032 |
| SL 11"     | 111 | 140 | 25 | 6  | 312 | SLIDER 4.5 | 74033 |
| SL 12"     | 116 | 145 | 25 | 6  | 330 | SLIDER 4.5 | 74034 |
| SL 13"     | 121 | 150 | 25 | 6  | 350 | SLIDER 4.5 | 74035 |

## SN | SLIDER FUTURITY 1"

**Application:** Reining

**Technology:** Steel

10 pairs



Steel hind shoe with more tapered branches for better dirt clearance and keeping good ground contact, suitable all arena types.

| MEASURES** | A   | B   | C  | H1 | GR. | NAILS      | ITEM  |
|------------|-----|-----|----|----|-----|------------|-------|
| SN 10"     | 106 | 135 | 25 | 6  | 298 | SLIDER 4.5 | 74052 |
| SN 11"     | 111 | 140 | 25 | 6  | 310 | SLIDER 4.5 | 74053 |
| SN 12"     | 116 | 145 | 25 | 6  | 325 | SLIDER 4.5 | 74054 |
| SN 13"     | 121 | 150 | 25 | 6  | 341 | SLIDER 4.5 | 74055 |

## S 7/8 | SLIDER 7/8 FOR CUTTING SHOE

**Application:** Reining

**Technology:** Steel

10 pairs





Steel hind shoe stamped holes suitable for young horses and cutting horses where too much slide can be a negative. Rolled and rockered toes.

| MEASURES** | A   | B   | C  | H1 | OZ. | NAILS      | ITEM  |
|------------|-----|-----|----|----|-----|------------|-------|
| S7/8 10"   | 106 | 135 | 22 | 6  | 275 | SLIDER 4.5 | 74072 |
| S7/8 11"   | 111 | 140 | 22 | 6  | 290 | SLIDER 4.5 | 74073 |
| S7/8 12"   | 116 | 145 | 22 | 6  | 306 | SLIDER 4.5 | 74074 |
| S7/8 13"   | 121 | 150 | 22 | 6  | 322 | SLIDER 4.5 | 74075 |



# Quarter Horse

## STEEL

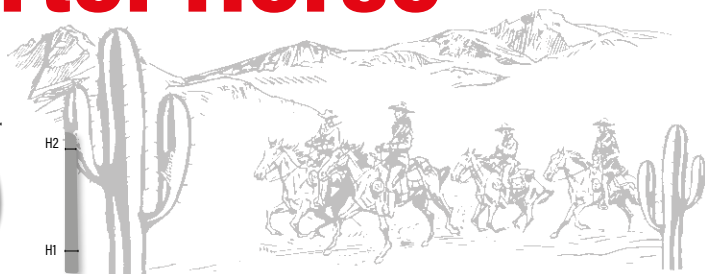

### QH8F | QUARTER HORSE 8mm FRONT

**Application:** Quarter, Endurance, Reining  
**Technology:** Forged Steel

10 pairs



Forged steel front horseshoes; 8 mm thick that guarantees longer product life.

| MEASURES** | A   | B   | C  | HI | GR. | NAILS | ITEM  |
|------------|-----|-----|----|----|-----|-------|-------|
| QH8F00     | 116 | 119 | 19 | 8  | 280 | CH 5  | 25661 |
| QH8F0      | 122 | 125 | 20 | 8  | 311 | CH 5  | 25662 |
| QH8F1      | 128 | 131 | 21 | 8  | 353 | CH 5  | 25663 |
| QH8F2      | 135 | 138 | 22 | 8  | 386 | CH 5  | 25664 |

### QH8B | QUARTER HORSE 8mm BACK

**Application:** Quarter, Endurance, Reining  
**Technology:** Forged Steel

10 pairs





Forged steel back horseshoes; 8 mm thick that guarantees longer product life.

| MEASURES** | A   | B   | C  | HI | GR. | NAILS | ITEM  |
|------------|-----|-----|----|----|-----|-------|-------|
| QH8B00     | 114 | 124 | 19 | 8  | 286 | CH 5  | 25671 |
| QH8B0      | 120 | 130 | 20 | 8  | 317 | CH 5  | 25672 |
| QH8B1      | 126 | 136 | 21 | 8  | 354 | CH 5  | 25673 |
| QH8B2      | 132 | 141 | 22 | 8  | 395 | CH 5  | 25674 |



# Quarter Horse

## ALUMINUM

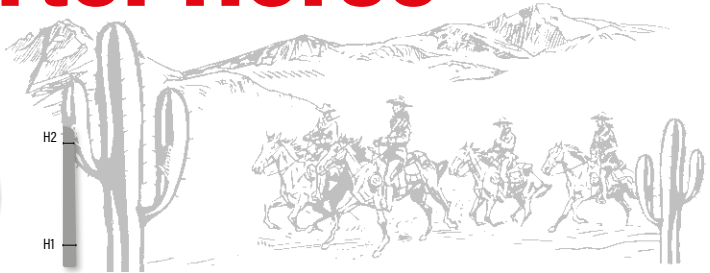

### QHFA | QUARTER HORSE FRONT ALUMINUM

10 pairs



**Application:** Quarter, Endurance, Reining  
**Technology:** Forged Aluminum

Drop forged aluminium shoe fullered with blunt toe to ease breakover. A flush toe insert for greater durability.



| MEASURES** | A   | B   | C  | H1  | GR. | NAILS      | ITEM |
|------------|-----|-----|----|-----|-----|------------|------|
| QHFA000    | 110 | 113 | 18 | 9,5 | 110 | FJ0/1 SLIM |      |
| QHFA00     | 116 | 119 | 19 | 9,5 | 120 | FJ0/1 SLIM |      |
| QHFA0      | 122 | 125 | 20 | 9,5 | 140 | FJ0/1 SLIM |      |
| QHFA1      | 128 | 131 | 21 | 9,5 | 150 | FJ0/1 SLIM |      |
| QHFA2      | 134 | 137 | 22 | 9,5 | 172 | FJ0/1 SLIM |      |

### FFA | FRONT FLAT ALUMINUM HORSESHOES

10 pairs



**Application:** Quarter, Endurance, Reining  
**Technology:** Forged Aluminum

Drop forged aluminium shoe fullered with a flush toe insert for greater durability.



| MEASURES* | A     | B     | C     | H1  | OZ.  | NAILS      | ITEM  |
|-----------|-------|-------|-------|-----|------|------------|-------|
| FFA 000   | 4 1/8 | 4 1/4 | 3/4   | 1/8 | 3.52 | FJ0/1 SLIM | 25520 |
| FFA 00    | 4 3/8 | 4 1/2 | 7/8   | 1/8 | 4.05 | FJ0/1 SLIM | 25521 |
| FFA 0     | 5 1/8 | 4 7/8 | 1     | 1/8 | 4.93 | FJ0/1 SLIM | 25522 |
| FFA 1     | 5 1/2 | 5 1/4 | 1 1/8 | 1/8 | 5.29 | FJ0/1 SLIM | 25523 |



**BFA | BACK FLAT ALUMINUM HORSESHOES**

10 pairs



**Application:** Quarter, Endurance  
**Technology:** Forged Aluminum



Drop forged aluminium Hind shoe fullered with a flush toe insert for greater durability.

| MEASURES*      | A                 | B                 | C | H1 | OZ.  | NAILS      | ITEM  |
|----------------|-------------------|-------------------|---|----|------|------------|-------|
| <b>BFA 000</b> | 4 ½               | 4 ¾ <sub>10</sub> | ¾ | ½  | 3.52 | FJO/1 SLIM | 25540 |
| <b>BFA 00</b>  | 4 ½               | 4 ¾ <sub>10</sub> | ¾ | ½  | 4.05 | FJO/1 SLIM | 25541 |
| <b>BFA 0</b>   | 4 ½               | 5 ½               | ¾ | ½  | 4.93 | FJO/1 SLIM | 25542 |
| <b>BFA 1</b>   | 4 ¾ <sub>10</sub> | 5 ½               | ¾ | ½  | 5.29 | FJO/1 SLIM | 25543 |

**2FWA | FRONT WEDGE 2° ALUMINUM HORSESHOES**

5 pairs



**Application:** Quarter, Endurance, Reining  
**Technology:** Forged Aluminum



Drop forged aluminium shoe fullered with a flush fitting toe insert for greater durability. With a 2 degree wedge.

| MEASURES*       | A                 | B   | C | H1 | H2 | OZ.  | NAILS      | ITEM  |
|-----------------|-------------------|-----|---|----|----|------|------------|-------|
| <b>2FWA 000</b> | 4 ½               | 4 ½ | ¾ | ½  | ½  | 4.93 | FJO/1 SLIM | 25510 |
| <b>2FWA 00</b>  | 4 ¾               | 4 ½ | ¾ | ½  | ½  | 5.11 | FJO/1 SLIM | 25511 |
| <b>2FWA 0</b>   | 5 ¼ <sub>10</sub> | 4 ¾ | ¾ | ½  | ½  | 5.29 | FJO/1 SLIM | 25512 |
| <b>2FWA 1</b>   | 5 ½               | 5 ½ | ¾ | ½  | ½  | 6.00 | FJO/1 SLIM | 25513 |

**3FWA | FRONT WEDGE 3° ALUMINUM HORSESHOES**

5 pairs



**Application:** Quarter, Endurance, Reining  
**Technology:** Forged Aluminum



Drop forged aluminium shoe fullered with a flush toe insert for greater durability. With a 3 degree wedge.

| MEASURES*       | A                 | B   | C | H1 | H2 | OZ.  | NAILS      | ITEM  |
|-----------------|-------------------|-----|---|----|----|------|------------|-------|
| <b>3FWA 000</b> | 4 ½               | 4 ½ | ¾ | ½  | ½  | 5.26 | FJO/1 SLIM | 25500 |
| <b>3FWA 00</b>  | 4 ¾               | 4 ½ | ¾ | ½  | ½  | 5.46 | FJO/1 SLIM | 25501 |
| <b>3FWA 0</b>   | 5 ¼ <sub>10</sub> | 4 ¾ | ¾ | ½  | ½  | 5.64 | FJO/1 SLIM | 25502 |
| <b>3FWA 1</b>   | 5 ½               | 5 ½ | ¾ | ½  | ¾  | 6.34 | FJO/1 SLIM | 25503 |



**RFA | ROLLER FORGED ALUMINUM**

5 pairs



**Application:** Quarter, Endurance, Reining  
**Technology:** Forged Aluminum





Front forged aluminium roller shoe having maximum rolled edge, chamfer starts at inner border and goes to outer edge, for the maximum of omnidirectional breakover.

| MEASURES*      | A   | B   | C | H1 | OZ.  | NAILS    | ITEM  |
|----------------|-----|-----|---|----|------|----------|-------|
| <b>RFA 000</b> | 4 ½ | 4 ½ | ¾ | ½  | 4.23 | FJ1 SLIM | 25565 |
| <b>RFA 00</b>  | 4 ¾ | 4 ½ | 1 | ½  | 4.86 | FJ1 SLIM | 25566 |
| <b>RFA 0</b>   | 5   | 5   | 1 | ½  | 5.29 | FJ1 SLIM | 25567 |
| <b>RFA 1</b>   | 5 ¼ | 5 ¼ | ¾ | ½  | 5.78 | FJ1 SLIM | 25568 |



# CNC

## ALUMINUM

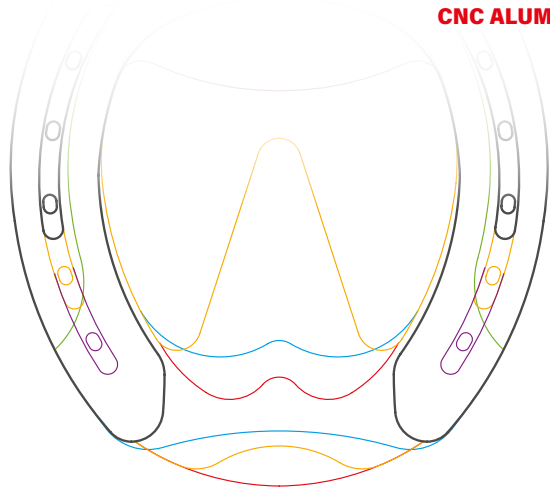

### RWA | ROLLER WEDGE ALUMINUM 3° FRONT

5 pairs



**Application:** Quarter, Jumping, Endurance, Reining  
**Technology:** CNC Aluminum



#### WEDGE

CNC milled front from the highest grade of aluminium alloy, rolled outer edge and concave inner edge to optimise breakover and traction, with three degree wedge for improved hoof balance.

| MEASURES* | A   | B   | C | H1 | H2 | OZ.  | NAILS    | ITEM  |
|-----------|-----|-----|---|----|----|------|----------|-------|
| RWA 000   | 4 ½ | 4 ½ | ¾ | ¼  | ½  | 4.23 | FJI SLIM | 25570 |
| RWA 00    | 4 ¾ | 4 ½ | 1 | ¼  | ½  | 4.86 | FJI SLIM | 25571 |
| RWA 0     | 5   | 5   | 1 | ¼  | ½  | 5.29 | FJI SLIM | 25572 |
| RWA 1     | 5 ¼ | 5 ¼ | ¾ | ¼  | ½  | 5.78 | FJI SLIM | 25573 |

### 12ABR | BAR ROLLER SHOE 12mm

5 pairs



**Application:** Quarter, Jumping, Endurance, Reining  
**Technology:** CNC Aluminum



CNC milled bar shoe from the highest grade of aluminium alloy for best durability. With rolled outer edge to give optimum omnidirectional breakover. Ideal for horses in competition or therapeutic uses.

| MEASURES* | A   | B   | C | H1 | OZ.  | NAILS    | ITEM  |
|-----------|-----|-----|---|----|------|----------|-------|
| ABR 000   | 4 ¼ | 4 ¾ | ¾ | ½  | 4.93 | FJI SLIM | 25580 |
| ABR 00    | 4 ½ | 4 ¾ | ¾ | ½  | 5.57 | FJI SLIM | 25581 |
| ABR 0     | 4 ¾ | 5   | ¾ | ½  | 6.34 | FJI SLIM | 25582 |
| ABR 1     | 5 ½ | 5 ¾ | ¾ | ½  | 8.11 | FJI SLIM | 25583 |



## AWB | WEDGE BAR 3° SHOE

5 pairs



**Application:** Quarter, Jumping, Endurance, Reining  
**Technology:** CNC Aluminum



CNC milled bar shoe from the highest grade of aluminium alloy for best durability. With a 3 degree wedge to help improve hoof balance. Ideal for horses in competition or therapeutic uses.

| MEASURES*      | A   | B   | C | H1 | H2 | OZ.  | NAILS    | ITEM  |
|----------------|-----|-----|---|----|----|------|----------|-------|
| <b>AWB 000</b> | 4 ¼ | 4 ¾ | ¾ | ¼  | ½  | 4.93 | FJI SLIM | 25590 |
| <b>AWB 00</b>  | 4 ½ | 4 ¾ | ¾ | ¼  | ½  | 5.57 | FJI SLIM | 25591 |
| <b>AWB 0</b>   | 4 ⅞ | 5   | ¾ | ¼  | ½  | 6.34 | FJI SLIM | 25592 |
| <b>AWB 1</b>   | 5 ½ | 5 ¾ | ⅞ | ¼  | ½  | 8.11 | FJI SLIM | 25593 |

## AWEB | WEDGE EGG BAR 3° SHOE

5 pairs



**Application:** Quarter, Jumping, Endurance, Reining  
**Technology:** CNC Aluminum



CNC milled bar shoe from the highest grade of aluminium alloy for best durability ideal eggbar shape. With the added benefit of a 3 degree wedge to help improve hoof balance.

| MEASURES*       | A   | B   | C | H1 | H2 | OZ.  | NAILS    | ITEM  |
|-----------------|-----|-----|---|----|----|------|----------|-------|
| <b>AWEB 000</b> | 4 ¼ | 4 ¾ | ¾ | ¼  | ½  | 4.93 | FJI SLIM | 25600 |
| <b>AWEB 00</b>  | 4 ½ | 5   | ¾ | ¼  | ½  | 5.64 | FJI SLIM | 25601 |
| <b>AWEB 0</b>   | 4 ⅞ | 5 ½ | ¾ | ¼  | ½  | 6.52 | FJI SLIM | 25602 |
| <b>AWEB 1</b>   | 5 ½ | 5 ¾ | ⅞ | ¼  | ½  | 8.46 | FJI SLIM | 25603 |

## AWHB | WEDGE HEART BAR 3° SHOE

5 pairs




**Application:** Quarter, Jumping, Endurance, Reining  
**Technology:** CNC Aluminum



CNC milled heart bar shoe from the highest grade of aluminium alloy for best durability, for added frog support with a three degree wedge to improve hoof balance and two strong side clips.

| MEASURES*       | A   | B   | C | H1 | H2 | OZ.  | NAILS    | ITEM  |
|-----------------|-----|-----|---|----|----|------|----------|-------|
| <b>AWEB 000</b> | 4 ¼ | 4 ¾ | ¾ | ¼  | ½  | 5.64 | FJI SLIM | 25610 |
| <b>AWEB 00</b>  | 4 ½ | 5   | ¾ | ¼  | ½  | 6.52 | FJI SLIM | 25611 |
| <b>AWEB 0</b>   | 4 ⅞ | 5 ½ | ¾ | ¼  | ½  | 7.58 | FJI SLIM | 25612 |
| <b>AWEB 1</b>   | 5 ½ | 5 ¾ | ⅞ | ¼  | ½  | 9.52 | FJI SLIM | 25613 |







# NETZERO COMPANY



8 056564 477806



**DOUBLE «S»**

*Horseshoes Worldwide*

**TRENTINO**

**Double S**

Loc. Festa 6/B - 38060 Brentonico (Trento) - ITALY

+39 0464 395 342

[www.doubles.it](http://www.doubles.it) [info@doubles.it](mailto:info@doubles.it)

